



SILENCERS

The use of natural fibre sound absorbing material enclosed in special anodised aluminium casings has allowed creating this new range of silencers that considerably reduce noise made by air at the vacuum generator exhaust.

There are two versions with different lengths: the longer the length and the more will the noise be reduced.

Noise reduction: from -13 to -20 dB (A);

Working temperature: from -20 to +100 °C.

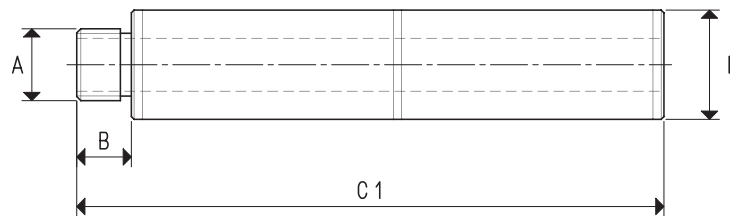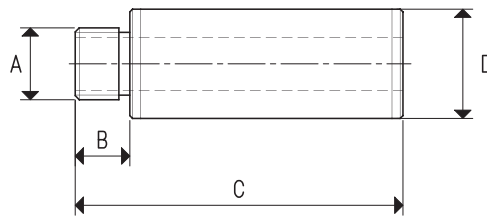

3D drawing available at www.vuototecnica.net

Art.	A Ø	B	C	C1	D Ø	Weight g
SSX 1/4"	G1/4"	10	60	--	20	20
SSX 3/8"	G3/8"	12	84	--	29	52
SSX 1/2"	G1/2"	14	106	--	35	96
SSX 3/4" R	G3/4"	14	106	--	35	100
SSX 3/4"	G3/4"	14	126	--	50	174
SSX 1"	G1"	14	146	--	60	240
SSX 1" 1/2	G1" 1/2	30	210	--	80	302
SSX 2"	G2"	30	230	--	90	372
2SSX 1/4"	G1/4"	10	--	108	20	40
2SSX 3/8"	G3/8"	12	--	154	29	104
2SSX 1/2"	G1/2"	14	--	196	35	192
2SSX 3/4"	G3/4"	14	--	236	50	348
2SSX 1"	G1"	14	--	276	55	480

8.80

Conversion ratio: inch = $\frac{\text{mm}}{25.4}$, pounds = $\frac{\text{g}}{453.6}$ = $\frac{\text{Kg}}{0.4536}$

GAS-NPT thread adapters available at page 1.117



8

